


## IMAGINE AUDIO FLAT PANEL VIDEO DISPLAY SPECIFICATION

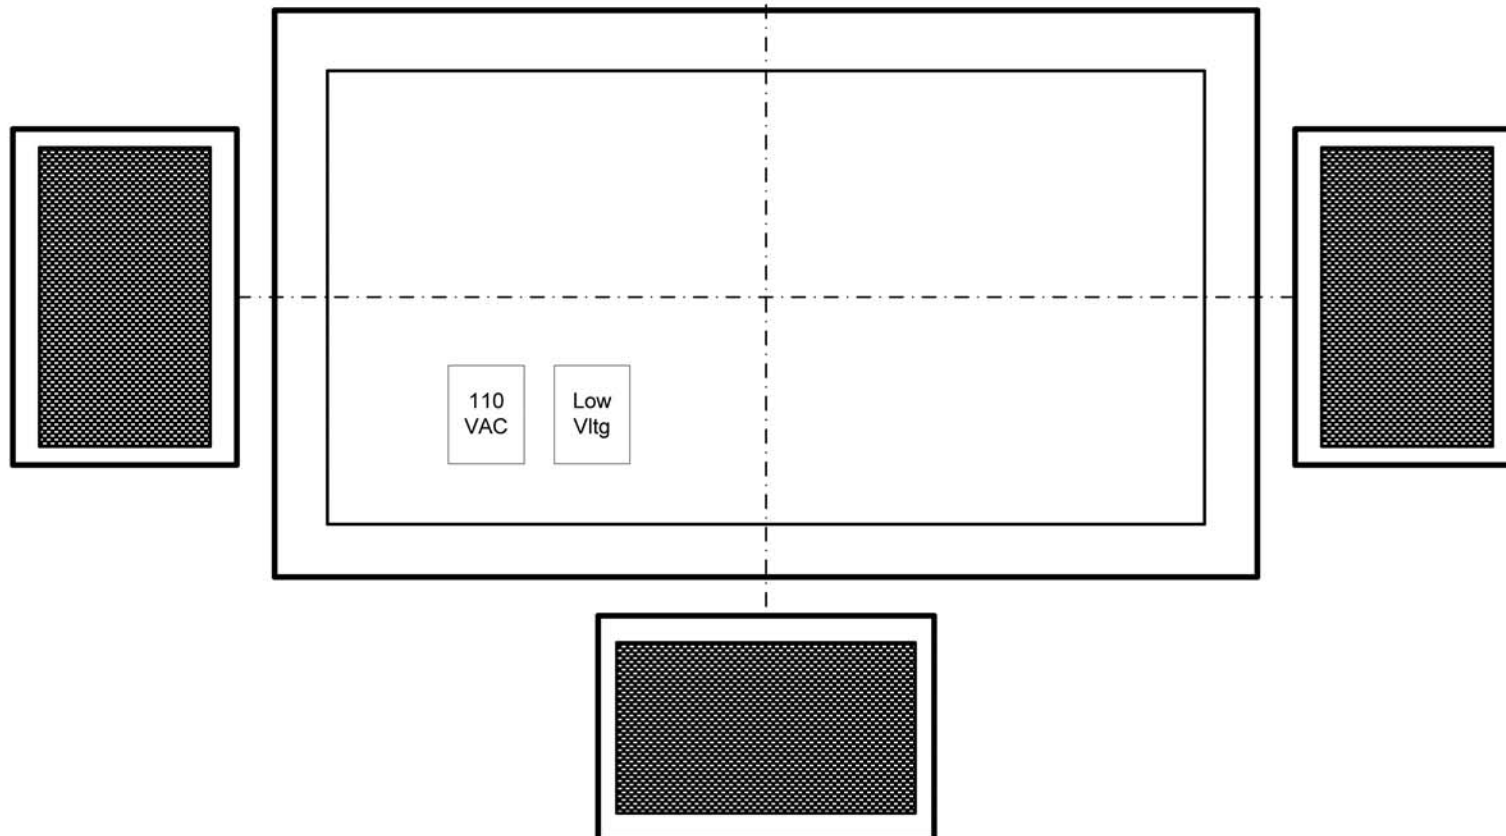

### NOTE:

- \* Locate flat panel video display at customer's desired location. Using the flat panel's dimensions draw center lines in both directions and install a 110VAC recessed (clock box) receptacle in any quadrant shown above, preferably lower left or lower right. Next to the power receptacle install a 1" conduit min. back to the customer's audio video equipment location to allow for the component video, composite video, audio and control interconnect to be installed.
- \* When recessing the flat panel allow 2" minimum clearance on all sides for ventilation and 10" of depth for a cantilever type bracket, inside clear.
- \* Allow sufficient wood backing along the center line in both directions for bracket mounting. Coverage should be roughly 1/3 the size of the screen.
- \* Front Left, Front Center and Front Right loudspeakers should be imagine Audio IA-700D's. If Front Left & Front Right speakers are mounted above 48" AFF locate the tweeter below the mid-bass driver. Front Center speaker should be mounted horizontal.
- \* See imagine Audio 5.1-7.1 Surround Sound Specification for additional speaker / cabling requirements.
- \* This specification has been prepared as a guideline only and may not allow for all flat panel and surround sound requirements.